

I. Replacement Procedure

Removal:

1. Remove fender mount nut holding pole subassembly and electrical wiring plug.
2. Remove antenna holders from antenna unit held by nut and bolt.
3. Remove nut covering drive mechanism.
4. Insert screwdriver into slotted opening holding cable and pry open, remove cable, (Figure 2)

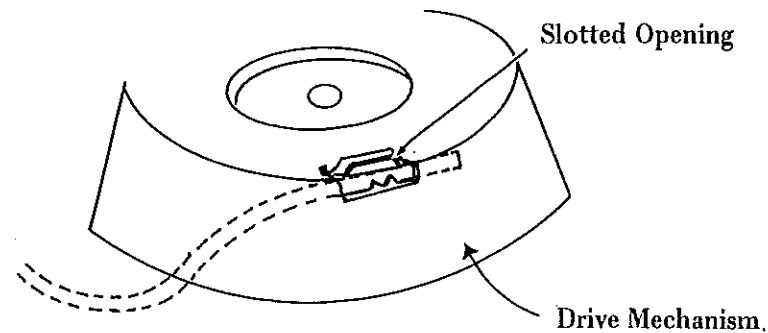


Figure 2

5. Remove 2 screws holding bottom band to motor drive unit.
6. Remove pole subassembly from motor drive unit and remove upper antenna holder-1.

Assembly:

1. Install antenna holder-1.
2. Install bottom band to pole subassembly and insert drive cable into motor drive unit (Figure 3).

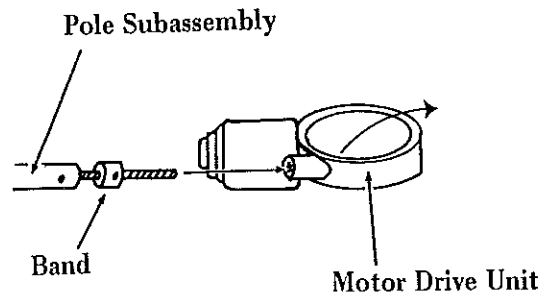


Figure 3