


# Virage®

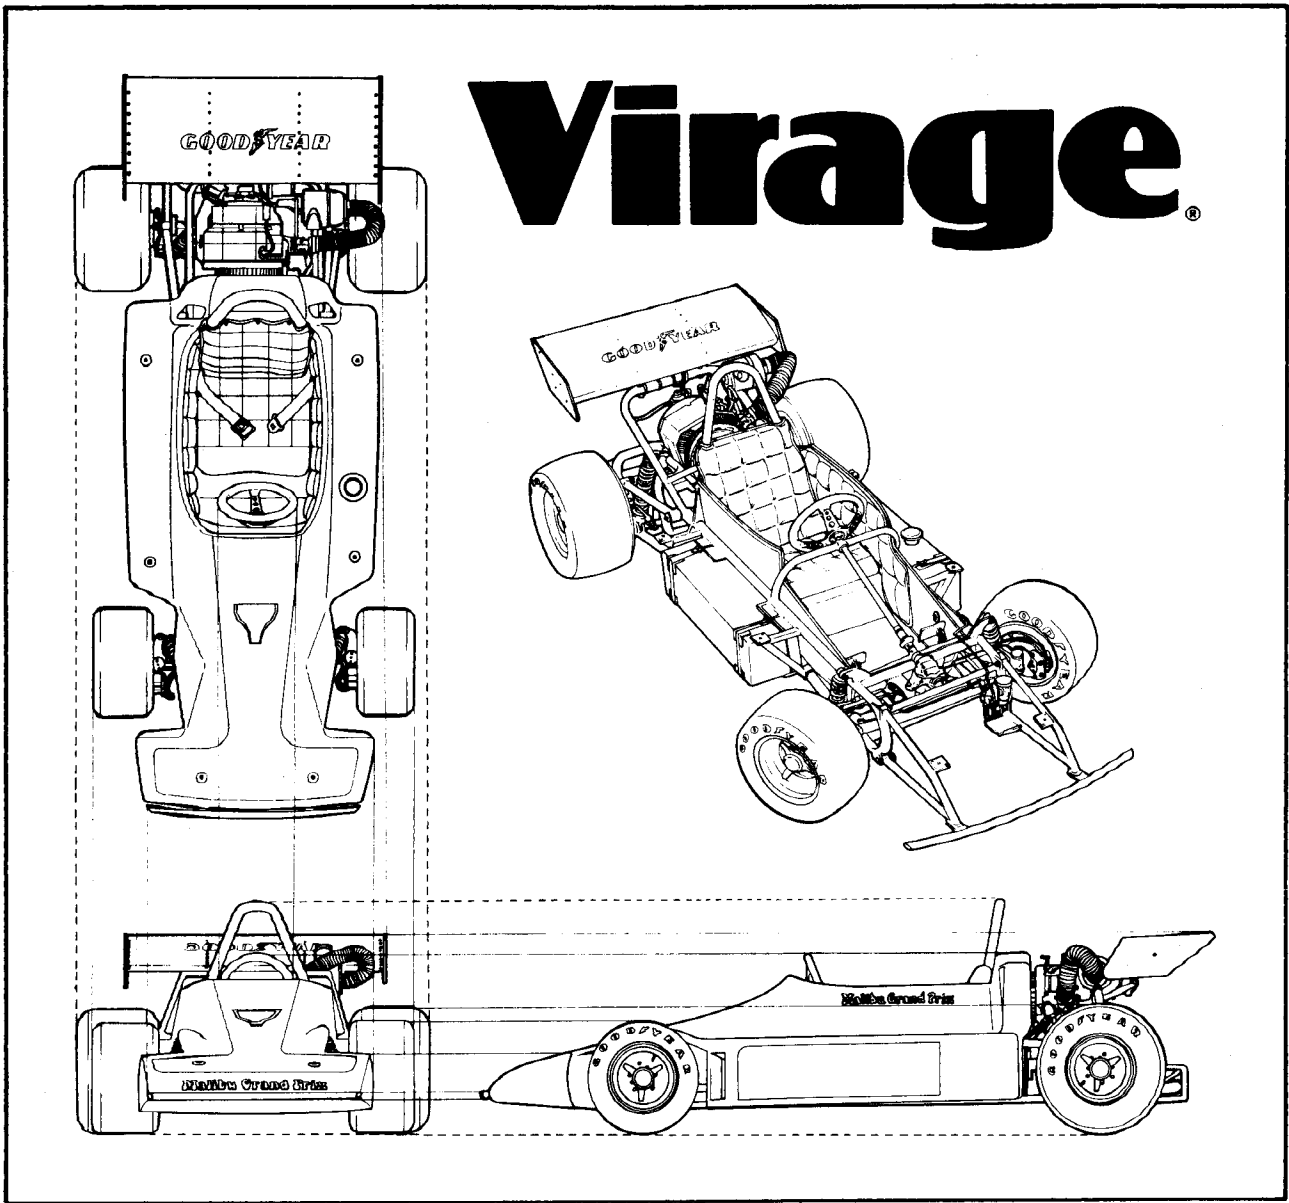

## Specifications of the Virage® Race Car Manufactured by Malibu Grand Prix®

### GENERAL DIMENSIONS

Height at Roll Bar 38.9" - (98.79 cm)  
 Weight 711 lbs - (322.50 kg)  
 Length (overall) 115" - (292.1 cm)  
 Wheelbase 72" - (182.88 cm)  
 Track front 51" - (129.54 cm)  
 rear 55" - (139.7 cm)  
 Body Width 42 1/4" - (107.31 cm)

### POWERPLANT

Engine Type & Displacement Fichtel, Sachs single rotor Wankel, 16.86 ci.  
 Compression ratio 8.5 to 1  
 Horsepower 24 at 6000 R.P.M.  
 Torque 20 ft. lbs @ 4800 R.P.M.  
 Carburetor Tillotson/M.G.P.  
 Exhaust Tuned Muffler

### DRIVE TRAIN

Transmission Comet/M.G.P./Salsbury  
 Torque Sensitive infinitely variable  
 3.88 to .78:1 ratio  
 Rear Axle M.G.P./Dana, 7.83:1 ratio

### CHASSIS AND SUSPENSION

Frame Type 4130 Double loop space frame  
 Front Suspension Twin Tubular, independent swing axle, Hydraulic shocks  
 Rear Suspension 4 link parallel trailing arm, Hydraulic shocks  
 Springs 90-120 lbs., dual rate coil (all around)

Steering TRW/M.G.P. Quick Ratio, 1 turn lock to lock  
 Fuel Tanks Twin steel saddle tanks, baffled to maintain car balance

### BRAKE SYSTEM

Type Full Hydraulic  
 Master Cylinder Girling  
 Front Hurst/Airheart M.G.P. Disc  
 Rear Bendix Self Energizing Drums

### WHEELS AND TIRES

Wheels 356-T6 Cast Aluminum  
 Front Tires Goodyear Slick, 18 x 9.50 -10  
 Rear Tires Goodyear Slick, 20 x 12.00 -10